



ORIGIN
ACOUSTICS®



D60 Series Director Collection

The Director 60 series is both powerful and discreet. Its two-way design in four performance levels offers a solution for systems that demand sonic purity in smaller spaces. Sharing technologies with its larger siblings, the 60 series will surprise listeners with its detail and impact.



D69



D67



D65



D63DT/SUR



D63



D61DT



D61

Director Technology

The entire speaker pivots allowing the sound to be directed toward the listening area from anywhere in the room.

DPSD™ Tweeter

This patented tweeter has the greatest output and is able to crossover much lower to either the woofer or the midrange improving both dispersion and the frequency response.

Woofer Cone Materials

This patented tweeter has the greatest output and is able to crossover much lower to either the woofer or the midrange improving both dispersion and the frequency response.

Compression Molded Baskets

These complex baskets that support the woofer cones were computer designed and compression molded with absolute precision allowing for unique support and venting elements to assure peak performance.

TriLinear® Configuration (TLC)

The three-driver design is efficient and is more precise by dividing the frequency spectrum into smaller segments allowing the individual drivers to concentrate on a more limited sonic palette.

Tool-Less Mounting System

The Tool-Less Installation secures the speaker in the ceiling with the exact torque to ensure a tight fit. This is accomplished by squeezing the clips into place and locking the speaker with a twist.

X-Wave™ Woofer Surround


This suspension element absorbs unwanted frequencies that reflect up and down the woofer cone to reduce harmonic distortion while maintaining the desired linear travel of the woofer.

EQ Adjustment

These switches on the baffle allows the adjustment of the output of either the high frequencies or both high and low frequencies to custom tailor the sound based on the proximity of the architectural elements of the room.

Specifications

Model	D69	D67	D65	D63DT/SUR	D63	D61DT	D61
Part Number	SCD60900	SCD60700	SCD60500	SCD2T60300	SCD60300	SCD2T60100	SCD60100
Woofer Cone	Kevlar	Glass Fiber	IMG	IMG	IMG	Poly/Rubber	Poly/Rubber
Woofer Dimensions	6.5" (165mm)	6.5" (165mm)	6.5" (165mm)	6.5" (165mm)	6.5" (165mm)	6.5" (165mm)	6.5" (165mm)
Tweeter Dome	Silk DPSD	Silk DPSD	Silk DPSD	Aluminum	Aluminum	Silk	Silk
Tweeter Diameter	1" (25mm)	1" (25mm)	1" (25mm)	1" (25mm)	1" (25mm)	1" (25mm)	1" (25mm)
Frequency Response	40 Hz - 20 kHz	43 Hz - 20 kHz	45 Hz - 20 kHz	48 Hz - 20 kHz	48 Hz - 20 kHz	48 Hz - 20 kHz	48 Hz - 20 kHz
Impedance	6 ohm Minimum	6 ohm Minimum	6 ohm Minimum	6 ohm Minimum	6 ohm Minimum	6 ohm Minimum	6 ohm Minimum
Power Handling	25 - 160 Watts	25 - 150 Watts	25 - 140 Watts	25 - 125 Watts	25 - 125 Watts	25 - 125 Watts	25 - 125 Watts
Diameter	9.61" (244mm)	9.61" (244mm)	9.61" (244mm)	9.61" (244mm)	9.61" (244mm)	9.61" (244mm)	9.61" (244mm)
Grille Diameter	10" (254mm)	10" (254mm)	10" (254mm)	10" (254mm)	10" (254mm)	10" (254mm)	10" (254mm)
Cutout Diameter	8.75" (222mm)	8.75" (222mm)	8.75" (222mm)	8.75" (222mm)	8.75" (222mm)	8.75" (222mm)	8.75" (222mm)
Mounting Depth	4.57" (116mm)	4.57" (116mm)	4.57" (116mm)	3.99" (101mm)	3.72" (94mm)	3.46" (88mm)	3.46" (88mm)

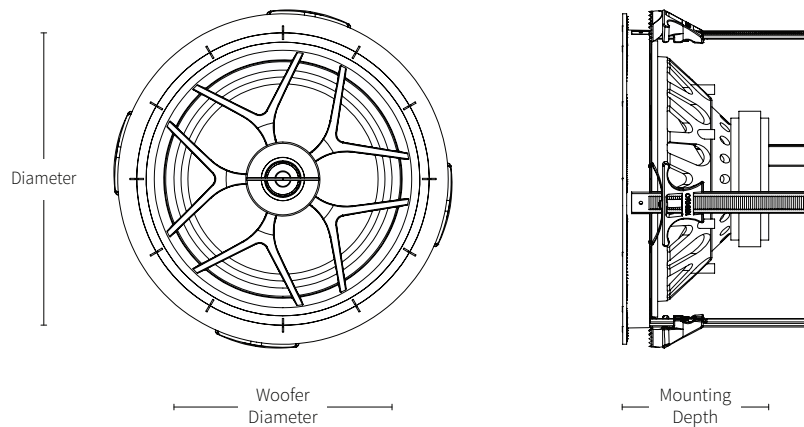

*Not to Scale