



# 3" DIRECTOR SERIES

**SMALL APERTURE.  
HUGE SOUND.**

The increasing popularity of smaller recessed light openings has created a huge demand for speakers that “line up” with ceiling lighting.

**PRODUCT ID**



D39



DSUB6F3K

Designed with architects and interior designers in mind, the Minimal Opening 3" Series aesthetically matches high-end 4" can lights. Delivering even under the meticulous constraints of the interior design community, they leave the smallest visible imprint, whether the lights are square or round, without compromising sound quality.

**CLEAN  
POWERFUL BASS**

Paired with our matching 3" aperture in-ceiling sub and DSP3-150 Amplifier, looking good had never sounded better.

**BUNDLE**



D39






DSUB6F3K



DSP3-150

# 3" DIRECTOR SERIES

<b>SPECIFICATIONS</b>	<b>D39</b>
Cutout Diameter	3 1/4" (83mm)
Speaker Diameter	3 15/16" (100mm)
Mounting Depth	3 15/16" (100mm)
Grille Diameter	4 1/4" (108mm)
Grille Depth	1/8" (3mm)



## SPECIFICATIONS

### D39





<b>Part</b>	SCD30900
<b>Tweeter</b>	3/4" Silk DPSD™
<b>Woofer</b>	3" Kevlar®
<b>Frequency Response</b>	100Hz-20kHz
<b>Power Handling</b>	30 - 100 Watts
<b>Impedance</b>	10 ohm (per driver)

## SPECIFICATIONS





### DSUB6F3K

<b>Part</b>	SDSUB6F300
<b>Woofer</b>	Dual 6 1/2" Poly
<b>Frequency Response</b>	33Hz-200Hz
<b>Power Handling</b>	100-250 Watts
<b>Nominal Impedance</b>	10 ohm (each driver)
<b>Dimensions</b>	7 7/8" H x 11 3/16" W x 18 15/16" L (200H x 300W x 480L mm)
<b>Mounting Depth</b>	<b>8" (203mm)</b>

## LINE DRAWINGS



D39

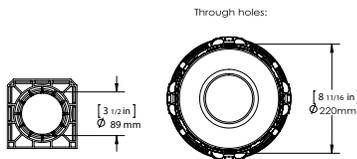

DSUB6F3K



Please visit [docs.originacoustics.com](https://docs.originacoustics.com) or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.