



5" DIRECTOR SERIES

DETAILS MATTER

The increasing popularity of smaller recessed light openings has created a huge demand for speakers that match the size of ceiling lights and blend seamlessly into any space.

PRODUCT ID



D59



D57



D57DT/SUR



D50-8

Designed with architects and interior designers in mind, the Director 5" Series aesthetically matches high-end 6" can lights, while still producing excellent sound quality.

Paired with our matching 5" aperture in-ceiling sub and the latest Origin PRO ProA250.2 Amplifier, looking good has never sounded better.


BUNDLE



D59



DSUB6F5K



PROA250.2

RESOUNDING CLARITY

The D57-59 models boast our patented Dual Plane Stabilization Diaphragm (DPSD™) Tweeter technology, the secret of Origin Acoustics' superior sound staging. This patented tweeter design not only improves high-frequency performance, but prevents distortion and increases loudness.



DPSD™ TWEETER



5" DIRECTOR SERIES




SPECIFICATIONS ALL 5" SERIES

Cutout Diameter 5 7/8" (150mm)





Speaker Diameter 6 3/4" (172mm)

Grille Diameter 7 3/16" (182mm)





Grille Depth 3/16" (5mm)

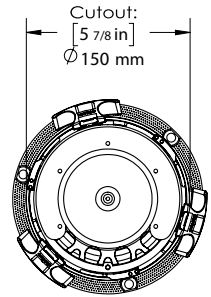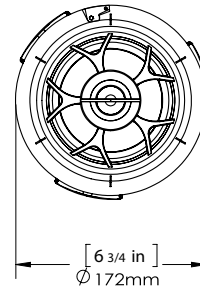





LINE DRAWINGS

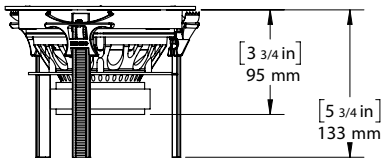

D57-59

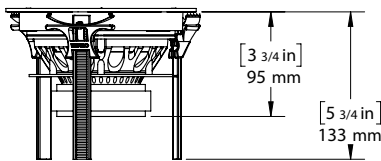

D57 DT/SUR

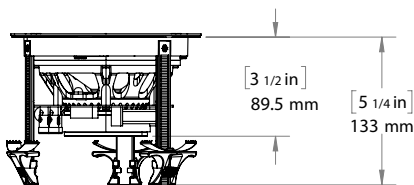

D50-8



Please visit docs.originacoustics.com or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.



5" DIRECTOR SERIES

SPECIFICATIONS	D59	D57	D57DT/SUR	D50-8
Part	SCD50900	SCD50700	SCD2T50700	SCD5000-8
Tweeter	1" Silk DPSD™ MMP™	1" Silk DPSD™ MMP™	¾" Dual Silk DPSD™	1" Silk Pivoting
Woofers	5 ¼" Kevlar®	5 ¼" Glass Fiber	5 ¼" Glass Fiber	5 ¼" Poly/Rubber
Power Handling	40 - 125 Watts	40 - 125 Watts	40 - 125 Watts	30 - 100 Watts
Frequency Response	68Hz-20kHz	69Hz-20kHz	69Hz-20kHz	74Hz-20kHz (-3dB)
Impedance	6 ohm	6 ohm	6 ohm	6 ohm
Mounting Depth	3 ¾" (95mm)	3 ¾" (95mm)	3 ¾" (95mm)	3 ½" (90mm)



Please visit docs.originacoustics.com or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.