



8" DIRECTOR SERIES

**MORE BASS.
LESS SPACE.**

A 6" loudspeaker simply cannot create the low end of an 8". But most 8" loudspeakers require huge cut-outs. Your clients do not want to compromise aesthetics or quality. The Director Collection addresses just that. All Origin Acoustics 6" & 8" Director Collection Loudspeakers fit into the same cut-out size. By installing a long-throw, 8" woofer loudspeaker, without needing additional space in the ceiling, you are able to offer your customer more bass, in less space.

PRODUCT ID



D89



D87



D85



D83



D83A



D83DT/SUR



D81-6 (6 PACK)



D80DT



D80-8 (8 PACK)



MULTI-MOTION™ TWEETER



TRI-LINEAR® CONFIGURATION



DPSD™ TWEETER



TOOL-LESS MOUNTING SYSTEM



VARIABLE DEPTH
ABSORPTION LAYER®



X-WAVE® WOOFER SURROUND



BASS & TREBLE EQ ADJUSTMENT
89 & 87 • Bass & Treble EQ
85 • Treble EQ



8" DIRECTOR SERIES






SPECIFICATIONS ALL 8" SERIES

Cutout Diameter 8 3/4" (222mm)

Speaker Diameter 9 5/8" (244mm)

Grille Diameter 10" (254mm)

Grille Depth 3/16" (5mm)

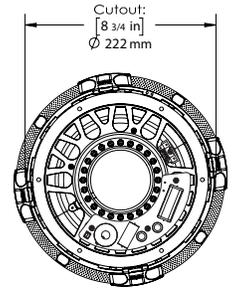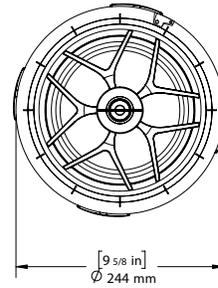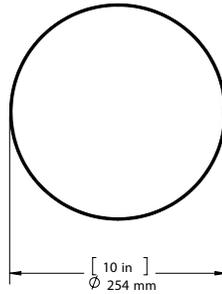

SPECIFICATIONS

D89

D87

D85

| SPECIFICATIONS | D89 | D87 | D85 |
|--------------------|----------------------|----------------------|----------------------|
| Part | SDC80900 | SCD80700 | SCD80500 |
| Tweeter | 3/4" Silk DPSD™ MMP® | 3/4" Silk DPSD™ MMP® | 3/4" Silk DPSD™ MMP® |
| Midrange | 4" Kevlar® | 4" Glass Fiber | 4" IMG |
| Woofer | 8" Kevlar® | 8" Glass Fiber | 8" IMG |
| Frequency Response | 30Hz-20kHz | 34Hz-20kHz | 36Hz-20kHz |
| Power Handling | 50-150 Watts | 50-150 Watts | 50-150 Watts |
| Impedance | 6 ohm | 6 ohm | 6 ohm |
| Mounting Depth | 5 5/8" (142mm) | 5 5/8" (142mm) | 5 5/8" (142mm) |

SPECIFICATIONS

D83

D83A

D83DT | SUR





| SPECIFICATIONS | D83 | D83A | D83DT SUR |
|--------------------|-----------------|--------------------|------------------|
| Part | SDC80300 | SCD8030A | SCD2T80300 |
| Tweeter | 1" Aluminum | 1" Aluminum MMP® | Dual 1" Aluminum |
| Midrange | N/A | N/A | N/A |
| Woofer | 8" IMG | 8" IMG Fixed Angle | 8" IMG |
| Frequency Response | 38Hz-20kHz | 38Hz-20kHz | 38Hz-20kHz |
| Power Handling | 50-150 Watts | 50-150 Watts | 50-150 Watts |
| Impedance | 6 ohm | 6 ohm | 6 ohm |
| Mounting Depth | 4 3/16" (106mm) | 4 11/16" (119mm) | 4 9/16" (111mm) |







8" DIRECTOR SERIES

| SPECIFICATIONS | D81-6 | D80-DT | D80-8 |
|--------------------|----------------|----------------|------------------|
| Part | SCD80100 | SCD2T80000 | SCD80000 |
| Tweeter | 1" Silk MMP® | Dual 1" Silk | 1" Silk Pivoting |
| Midrange | N/A | N/A | N/A |
| Woofers | 8" Poly/Rubber | 8" Poly/Rubber | 8" Poly/Rubber |
| Frequency Response | 38Hz-20kHz | 40Hz-20kHz | 40Hz-20kHz |
| Power Handling | 50-150 Watts | 40-100 Watts | 40-100 Watts |
| Impedance | 6 ohm | 6 ohm | 6 ohm |
| Mounting Depth | 4 1/4" (108mm) | 4 1/2" (114mm) | 4 5/16" (109mm) |





LINE DRAWINGS

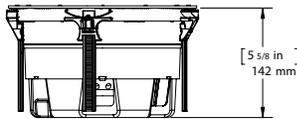

D85-D89

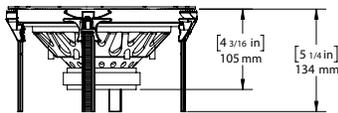

D83

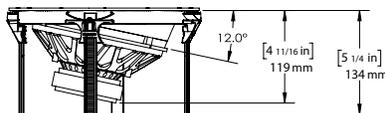


D83-A



8" DIRECTOR SERIES

LINE DRAWINGS

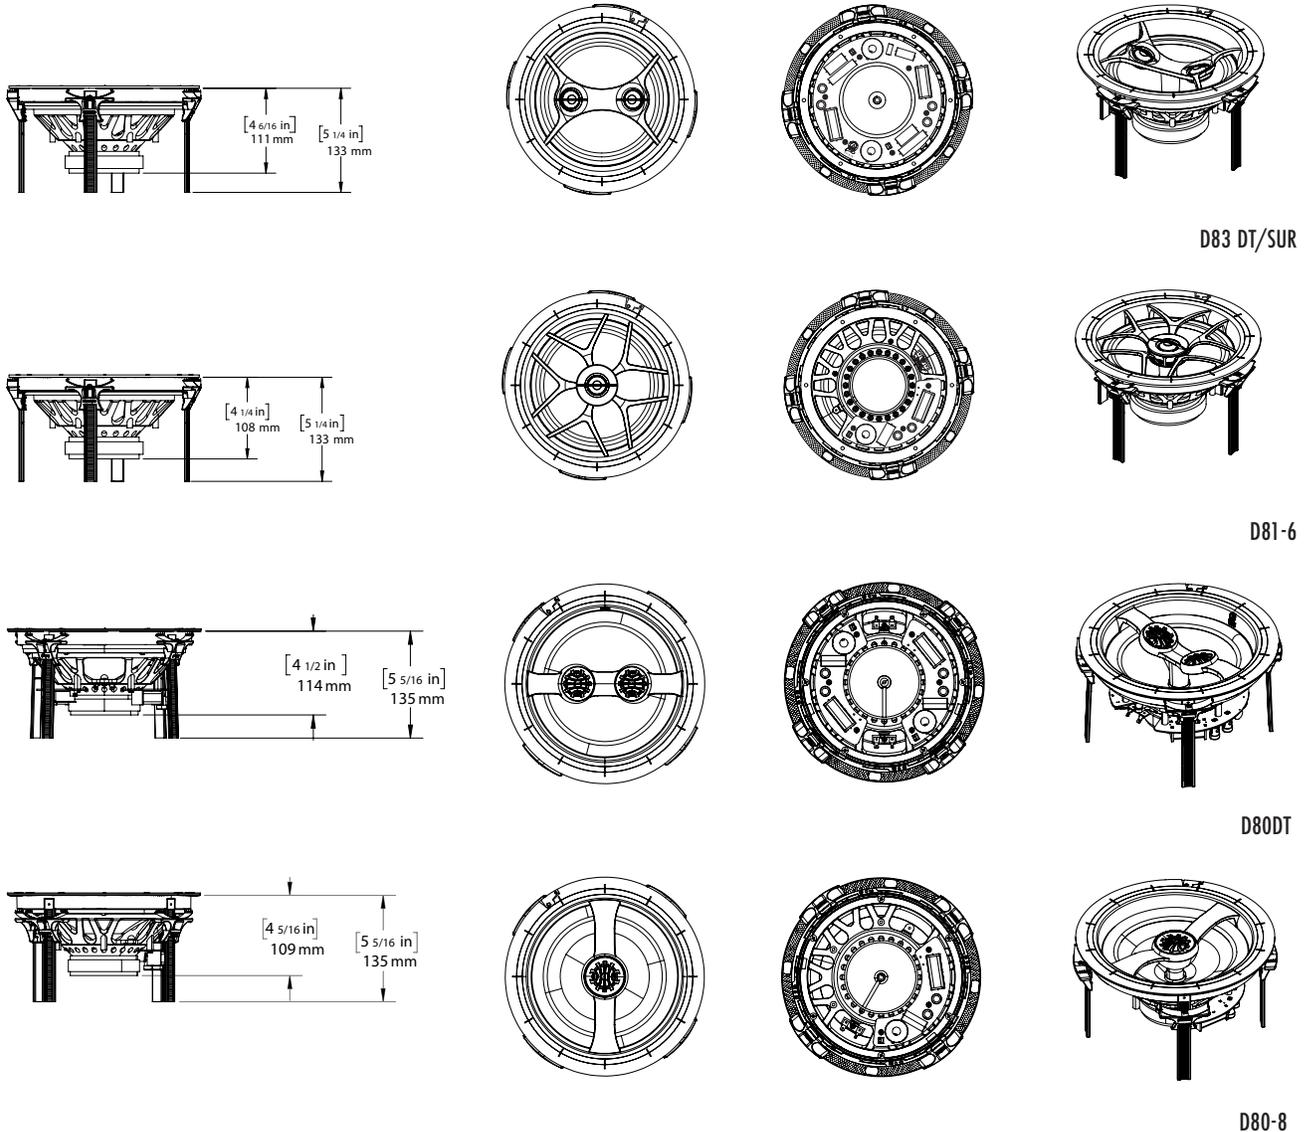

Please visit docs.originacoustics.com or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.