



# ROCK LOUDSPEAKERS

## OVERVIEW

When a natural aesthetic is required, there is nothing like a rock speaker to fit the bill. Using a polyurethane/resin composite that is incredibly durable, the stone-like exterior will survive the harshest environments and provide quality sound for years to come. Available in 6" and 8" two-way designs and offering an additional 8" subwoofer, these speakers can stand on their own or be mixed with the rest of the Seasons Collections as the application demands.

## PRODUCT ID



OSR85



OSR65



OSR8SUB

## TAPS

The 70V/8 ohm Rock speakers feature multiple taps off the transformer adjusted by a rotary switch on the bottom side of the speaker. The higher the wattage selected the more output will be generated by the speaker.

The rocks are designed to seamlessly simulate natural rocks in your landscape.





# ROCK LOUDSPEAKERS

## SPECIFICATIONS

### OSR85

---

Part	OSR8500
Woofers	8" Injection Polypropylene with Rubber Surround
Tweeter	1" (25mm) Titanium
Frequency Response	40Hz – 20kHz
Power Handling	5 – 100 watts
Impedance	8 ohm, 70v – 60W/30W/15W/7.5W transformer taps
Dimensions	15 x 21 x 16" (38 x 52 x 39 cm)
Weight	11 lbs (5 kg)
Environment Temp	-13° - 149°F (-25°C - 65°C)

## SPECIFICATIONS

### OSR65

---

Part	OSR6500
Woofers	6" Injection Polypropylene with Rubber Surround
Tweeter	1" (25mm) Titanium
Frequency Response	50Hz – 20kHz
Power Handling	5 – 100 watts
Impedance	8 ohm, 70v – 30W/15W/7.5W/3.7W transformer taps
Dimensions	12 x 17 x 14" (29 x 43 x 35 cm)
Weight	11 lbs (5 kg)
Environment Temp	-13° - 149°F (-25°C - 65°C)





# ROCK LOUDSPEAKERS

## SPECIFICATIONS


## OSR8SUB

Part	OSR800SUB
Woofer	8" Polypropylene with Rubber Surround
Tweeter	-
Frequency Response	35Hz – 150Hz
Power Handling	5 – 100 watts
Impedance	8 ohm, 70v – 120W/60W/30W/15W transformer taps
Dimensions	15 x 21 x 16" (38 x 52 x 39 cm)
Weight	22 lbs (10 kg)
Environment Temp	-13° - 149°F (-25°C - 65°C)

## LINE DRAWINGS

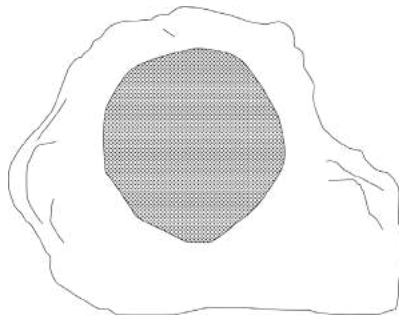

OSR85

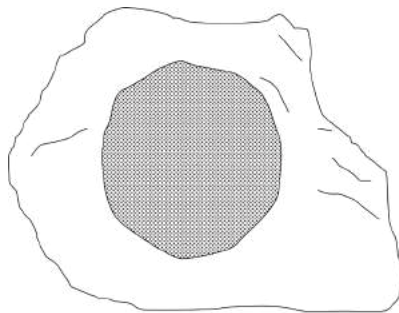

OSR65

Please see [originacoustics.com](http://originacoustics.com) for most the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.